

Supplementary material

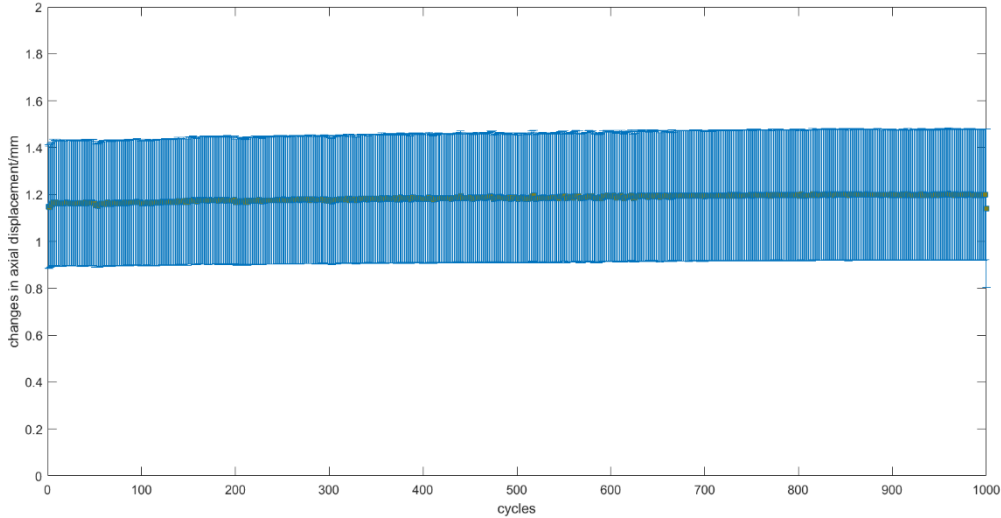


Figure S1: Mean and standard deviation of changes in axial displacement (d) during cyclic loading [30 1200 N] of all specimens implanted with COPAL knee spacers.



Figure S2: Broken femoral component of COPAL knee spacer of one specimen during cyclic loading to 2600 N